

THIEF RIVER FALLS TOP/REAR VENT GAS SPECIFICATIONS

Zone Heat

Install a Kozy Heat furnace rated, high efficient fireplace and save money - lower your fuel bill when you turn your furnace down and heat only the room(s) where you'll be spending time in.

Standard Features

- 28,000 BTU/hr input-NG & 28,000 BTU/hr input - LP
- High efficiency: NG - 80% LP Gas - 82%
(Steady state efficiency at high burn)
- **Canada P-4 approved**
- High quality lifetime warranty glass (35" x 26")
- Quick-latch glass
- Accepts rigid pipe; rear vent ready
- Model TRF-IPI only (electric ignition), remote modulating valve system w/flame, fan adjustment & fan kit
- Upper grill/hood and lower grill (black)
- High-low regulator
- Patented log design
- Minnesota Energy Code compliant to 50 pascals

Optional Features

- See page 12 for optional doors/full door faces
- Brick refractory
- Red brick refractory
- Black enamel panels
- Flex vent adaptor kit
- Automatic fan kit with variable speed control (2-75 CFM) - model TRF only
- Remote control or thermostat remote control - model TRF only
- Wall mount thermostat/wireless wall mount thermostat - model TRF only
- Wall, corner cabinets & flush surrounds - refer to the cabinetry brochure

Safety

- **Each unit factory tested!**
- Tested by OMNI-Test Laboratories
Complies with ANSI Z21.88a-2007•CSA 2.33a-2007 'Vented gas fireplace heaters'
- Sealed combustion chamber with standing pilot ignition
- Removable millivolt board with 30-second delay pilot
- Automatic pressure relief glass system
- Bedroom and mobile home approved

Specifications

- Height - 34 1/2"
- Width - 40 3/4"
- Back Width - 22 1/2"
- Depth - 15 3/4"
- Weight - 180 lbs.

Framing Dimensions





- Height - 38 1/4"
- Width - 41 1/4"
- Depth - 16 1/4"
- Platform 40 3/4" W x 15 3/4" D

Clearances

- Top of unit face to framing - 3 1/2"
- From unit left & right sides & back - 1/2"
- Surround sides (flush) - 0"
- To flooring - 0"
- Unit top to ceiling - 31"
- From the unit's side to adjacent sidewall - 0"
- Mantel 8" deep from top of unit - 8"
- Mantel 12" deep from top of unit - 12"

*Please refer to mantel projection chart in the installation manual

Refer to the #56701 installation manual for complete installation & venting requirements

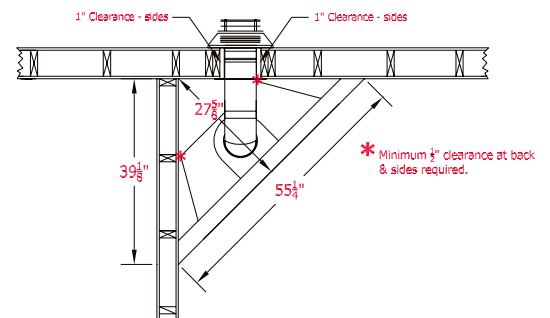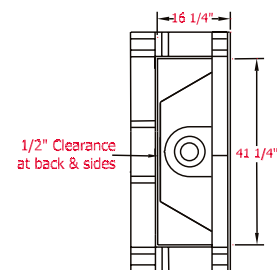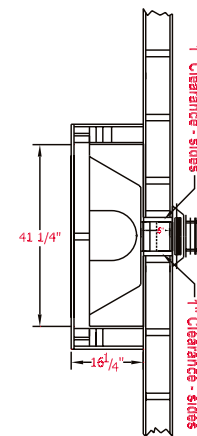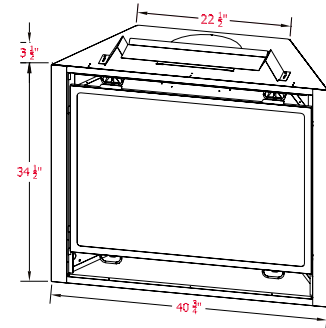


*Thief River Falls
w/Rectangular Prairie
pattern full door face*



*Thief River Falls
w/Mission
design doors*



*Thief River Falls w/Arched
Drake pattern full door face -
Keystone wall cabinet*

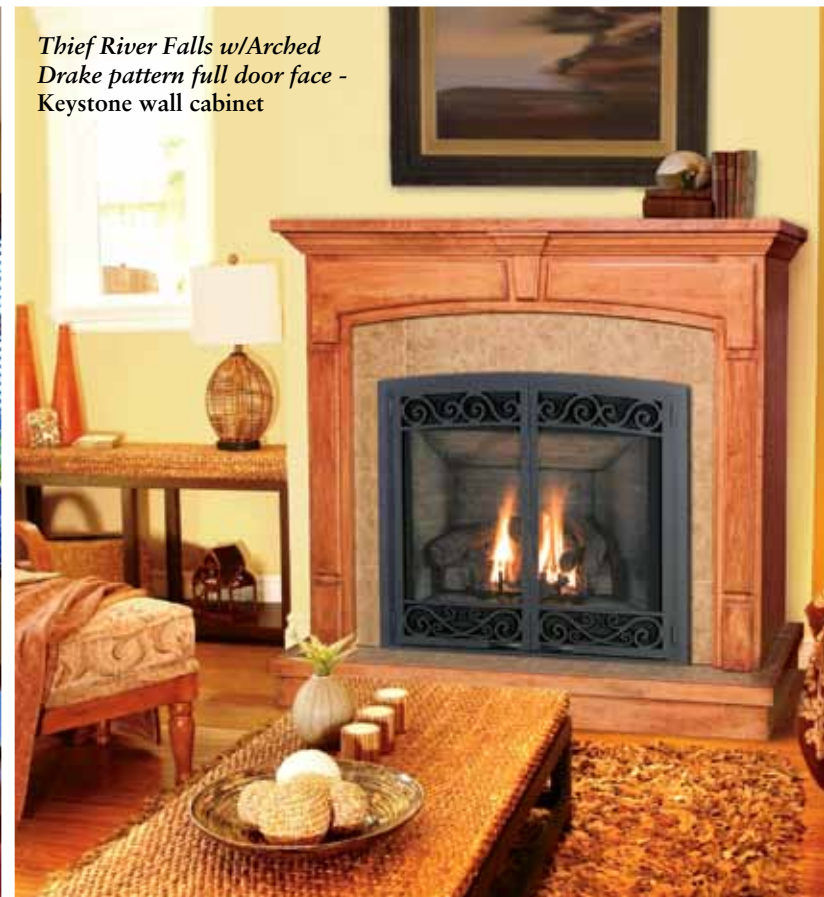

The *Thief River Falls (TRF)* offers value, heat, and a slim-profile that is the best in its class. The *TRF* has the ability to be vented off the top or back allowing it to be installed in almost any situation. The large viewing area and realistic logs and burner make the *TRF* a perfect fireplace when space is a concern. Numerous door and face options allow the *TRF* to be customized for your décor.